

**UNITED STATES DISTRICT COURT
EASTERN DISTRICT OF NEW YORK**

Certicable Inc.,

Plaintiff,

v.

Point 2 Point Communications Corporation

Defendant.

Case No: 2:23-cv-05322

**COMPLAINT FOR PATENT
INFRINGEMENT**

NATURE OF ACTION

Plaintiff, Certicable Inc, by its attorneys, for its Complaint against Defendant Point 2 Point Communications Corporation, alleges as follows:

1. This is an action for infringement of United States Patent No. 10,444,454 (the patent-in-suit) arising under the patent laws of the United States, Title 35, United States Code, Sections 100 et seq. This action relates to a The accused product is an Armored Data Cable Assembly. The accused product infringes Claims 1 - 7 of U.S. Patent No. 10,444,454. Specifically, the alleged infringing cable appears to include a non-interlocking armor, an outer jacket, a pull material, and multiple optic fibers as claimed in Claim 1 and at least one fiber optic fiber; and armor as claimed in Claim 4 of the '454 Patent.

THE PARTIES

2. Plaintiff, Certicable Inc, is a corporation organized and existing under the laws of the State of New York, having a principal place of business at 111 Carolyn Blvd. Farmingdale, New

York 11735. Plaintiff is engaged in the manufacturing of armored fiber optic cables with their patented stainless steel microfiber optic cable.

3. Upon information and belief, Defendant Point 2 Point Communications Corporation (Defendant) is a corporation organized and existing under the laws of the State of New York having a principal place of business at 149 West Montauk Highway, Lindenhurst, New York 11757. Upon information and belief, Defendant is engaged in the manufacture of communication cables and fiber optics.

JURISDICTION AND VENUE

4. This Court has jurisdiction over the subject matter of this action under 28 U.S.C. §§ 1331 (federal question) and 1338(a) (patent infringement).
5. This Court has personal jurisdiction over Defendant because, among other things, Defendant has purposely availed itself of the rights and benefits of the laws of New York State by engaging in systematic and continuous contacts with the state such that it should reasonably anticipate being hauled into court here. For example, Defendant is registered to conduct business in New York and has a regular and established place of business in this district at 149 West Montauk Highway, Lindenhurst, New York 11757.
6. Venue is proper in this Court pursuant to 28 U.S.C. § 1400(b). On information and belief, Defendant has committed acts of infringement of the patent-in-suit in this district by offering for sale and selling fiber optic cables appearing to include a non-interlocking armor, an outer jacket, a pull material, and multiple optic fibers that have contributed to and/or induced direct infringement in this district and Defendant has a regular and

established place of business in this district at 149 West Montauk Highway, Lindenhurst, New York 11757.

THE PATENT IN SUITE¹

7. Plaintiff repeats and incorporates by reference the allegations of paragraphs 1-6 above.
8. On 10/15/2019, the U.S. Patent and Trademark Office duly and legally issued the patent-in-suit, entitled ARMORED FLEXIBLE FIBER OPTIC ASSEMBLY. A true and correct copy of the patent-in-suit is attached as Exhibit A. The claims of the patent-in-suit cover Fiber Optic Cable Assembly. The claims of the patent-in-suit carry a presumption of validity under 35 U.S.C. § 282(a) and are enforceable.
9. Plaintiff is the owner of the entire right, title, and interest in the patent-in-suit and possesses the right to sue for and obtain equitable relief and damages for infringement of the patent-in-suit.
10. Defendant became aware of the patent-in-suit at least as early as July 12, 2023, on the date of service of this complaint. Or even earlier because (the President of Point 2 Point Communications (Roman Krawczyk) posted an article about TiniFiber's Microfiber Assembly. Plaintiff and Defendant are major competitors in a highly competitive industry where competitors closely monitor each other's new products and technology. A reasonable opportunity for discovery will likely provide evidentiary support for the fact that Defendant had earlier knowledge of the patent-in-suit.
11. Claims 1-7 of the patent-in-suit recite the following method:
 1. A fiber optic cable assembly comprising:
A non-interlocking armor, the non-interlocking armor, being formed from a single spiral tube having a gap between each spiraling ring of the spiral tube, the gap allowing the fiber optic cable assembly to have a bend radius of $\geq 5 D$; an outer jacket having an Inside diameter slightly greater than an outside diameter of the non-interlocking armor; a pull

¹ See Claim Comparison Chart – Exhibit B

material, the pull material being positioned underneath the outer jacket and on top of the non-interlocking armor; and at least one fiber optic fiber.

2. The fiber optic cable assembly of claim 1 further comprising: an inner jacket, the inner jacket having an outside diameter slightly less than an inner diameter of the non-interlocking armor; and a strengthening material, the strengthening material surrounding the at least one fiber optic fiber underneath the inner jacket.

3. The fiber optic cable assembly of claim 2 wherein the single, continuous metallic strip is stainless steel.

4. A fiber optic cable assembly comprising: at least one fiber optic fiber; and an armor for providing crush resistance for the at least one fiber optic cable, the armor being a single spiral tube having a gap between each spiraling ring of the spiral tube, the gap allowing the fiber optic cable assembly to have a bend radius of $\geq 5D$.

5. The fiber optic cable assembly of claim 4 wherein the spiral tube is stainless steel.

6. The fiber optic cable assembly of claim 5 further comprising: an outer jacket, the outer jacket having an inside diameter slightly greater than an outside diameter of the non-interlocking armor; and a pull material, the pull material being positioned underneath the outer jacket and on top of the non-interlocking armor.

7. The fiber optic cable assembly of claim 6 further comprising: an inner jacket, the inner jacket having an outside diameter slightly less than an inner diameter of the non-interlocking armor; and a strengthening material, the strengthening material surrounding the at least one fiber optic fiber underneath the inner jacket.

THE ACCUSED PRODUCT²

12. Defendant has infringed and continues to infringe the patent-in-suit by committing acts of contributory infringement and inducement of infringement. More particularly, upon information and belief, Defendant has infringed and continues to infringe at least claim 1-7 of the patent-in-suit by offering for sale, selling, or importing into the United States, Defendant's Fiber Optic Products (the Accused Product). The Accused Product is uniquely designed and adapted for use in the performance of the methods of the patent-in-suit, including the method of claims 1-7 of the patent-in-suit.

13. See Exhibit 2 – Claim Comparison Chart

² See Claim Comparison Chart – Exhibit B

COUNT 1 – DIRECT INFRINGEMENT

1. Plaintiff repeats and re-alleges the allegations of paragraphs 1 through 13 herein as if fully set forth.
2. Upon information and belief, Point 2 Point Communications has directly infringed, literally or under the doctrine of equivalents, one or more claims of the '454 Patent by making, using, testing, offering to sell, and/or selling within the United States, and/or importing into the United States and its Territories, without license or authority, the Accused Products, that are covered by the claims of the '454 Patent.
3. In violation of 35 U.S.C. § 271, Defendant is now and has been directly infringing the '454 patent.
4. Defendant has had knowledge of infringement of the '454 patent at least as of the service of the present complaint.
5. Defendant has directly infringed and continues to directly infringe at least claims 1-7 of the '454 patent by using, the Accused product without authority in the United States, and will continue to do so unless enjoined by this Court. As a direct and proximate result of Defendant's direct infringement of the '454 patent, Plaintiff has been and continues to be damaged.

PLAINTIFFS INJURY

6. Plaintiff has suffered injury, including irreparable injury, as a result of Defendant's infringement. Plaintiff is therefore entitled to preliminary and permanent injunctive relief restraining and enjoining Defendant from infringing the patent-in-suit.
7. By reason of Defendant's infringement, Plaintiff is suffering and will continue to suffer substantial damages in an amount to be determined at trial.

PRAYER FOR RELIEF

WHEREFORE, Plaintiff requests that this Court grant the following relief:

1. A Judgment that one or more claims of the '454 Patent have been infringed and/or continue to be infringed directly and/or indirectly by way of inducement, literally and/or under the doctrine of equivalents, by Point 2 Point Communications. An order preliminarily and permanently restraining and enjoining Defendant, its officers, agents, attorneys, and employees, and those acting in privity or concert with Defendant, from engaging in the manufacture, use, offer for sale or sale within the United States, or importation into the United States, of the accused product until after the expiration date of the patent-in-suit;
2. Damages or other monetary relief to Plaintiff;
3. Costs and reasonable attorneys' fees relating to this action pursuant to 35 U.S.C. § 284 and 35 U.S.C. § 285; and
4. Such other and further relief as the Court may deem just and proper.

DEMAND FOR TRIAL BY JURY

Plaintiff demands a jury trial on all issues that are so triable.

Dated: July 12, 2023

By: 
Stephen Feldman
Feldman Law Group P.C.
120 Main Street
Huntington, NY 11743
(631)549-3770
Sfeldman1313@gmail.com

Exhibit A



(12) **United States Patent**
Peterson, III et al.

(10) **Patent No.:** **US 10,444,454 B2**
(45) **Date of Patent:** **Oct. 15, 2019**

(54) **ARMORED FLEXIBLE FIBER OPTIC ASSEMBLY**
(71) Applicant: **Certicable, Inc.**, Farmingdale, NY (US)
(72) Inventors: **Christian A. Peterson, III**, West Babylon, NY (US); **Barry Skolnick**, Islip, NY (US)
(73) Assignee: **Certicable, Inc.**, Farmingdale, NY (US)
(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

(21) Appl. No.: **15/897,607**
(22) Filed: **Feb. 15, 2018**
(65) **Prior Publication Data**
US 2018/0188464 A1 Jul. 5, 2018

Related U.S. Application Data
(63) Continuation of application No. 14/882,716, filed on Oct. 14, 2015, now Pat. No. 9,927,589, which is a continuation of application No. 14/055,611, filed on Oct. 16, 2013, now Pat. No. 9,182,562.

(51) **Int. Cl.**
G02B 6/44 (2006.01)
(52) **U.S. Cl.**
CPC **G02B 6/4433** (2013.01); **G02B 6/4435** (2013.01); **G02B 6/4463** (2013.01); **G02B 6/4434** (2013.01)
(58) **Field of Classification Search**
None
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

4,521,072 A *	6 1985	Cholley	G02B 6 4407	385 101
6,064,786 A *	5 2000	Cunningham	G02B 6 14	383 27
2003 0118295 A1 *	6 2003	Lail	G02B 6 4411	385 101
2006 0239624 A1 *	10 2006	Hsu	G02B 6 4429	385 107
2008 0008430 A1 *	1 2008	Kewisch	G02B 6 4478	385 113
2008 0247717 A1 *	10 2008	Patlakh	F4111 5 0457	385 113
2011 0075979 A1 *	3 2011	Ma	G02B 6 4427	385 107
2011 0103796 A1 *	5 2011	Mazzini	H04B 10 2503	398 79
2012 0044627 A1 *	2 2012	Haigh	B65H 75 4449	361 679.33


FOREIGN PATENT DOCUMENTS

EP 0505828 A1 * 9 1992 G02B 6 2835
* cited by examiner

Primary Examiner Sung H Pak
(74) *Attorney, Agent, or Firm* Feldman Law Group,
P.C.; Stephen E. Feldman

(57) **ABSTRACT**
The specification relates to a fiber optic cable assembly. The fiber optic cable assembly includes at least one fiber optic fiber; and an armor for providing crush resistance for the at least one fiber optic cable, the armor being a spiral tube having a gap between each spiraling ring of the spiral tube, the gap allowing the fiber optic cable assembly to have a bend radius of $\geq 5D$.

7 Claims, 2 Drawing Sheets

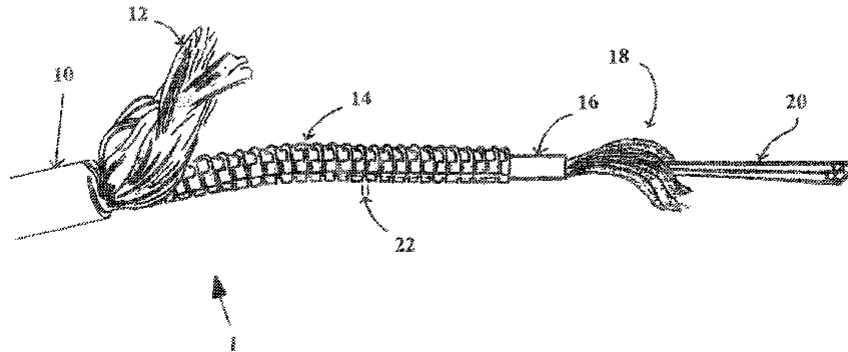

U.S. Patent

Oct. 15, 2019

Sheet 1 of 2

US 10,444,454 B2

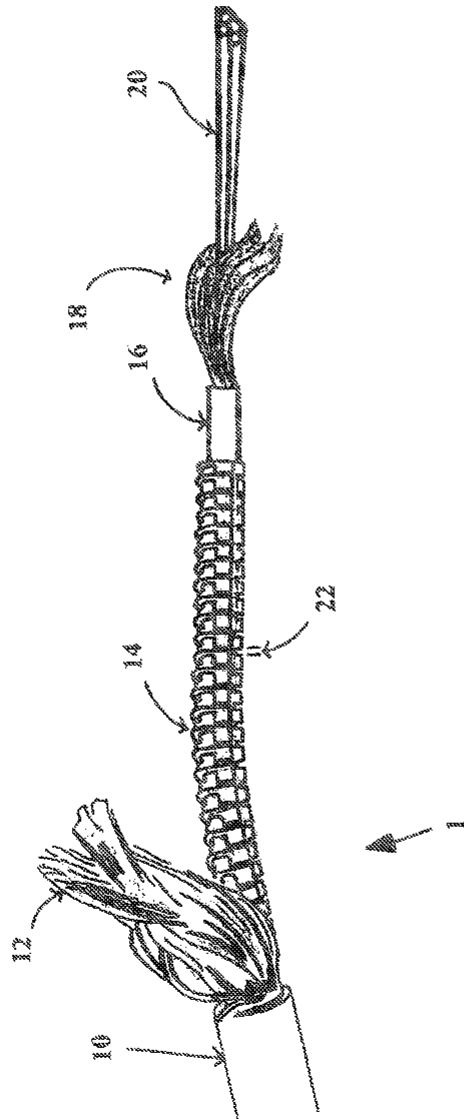


FIG. 1

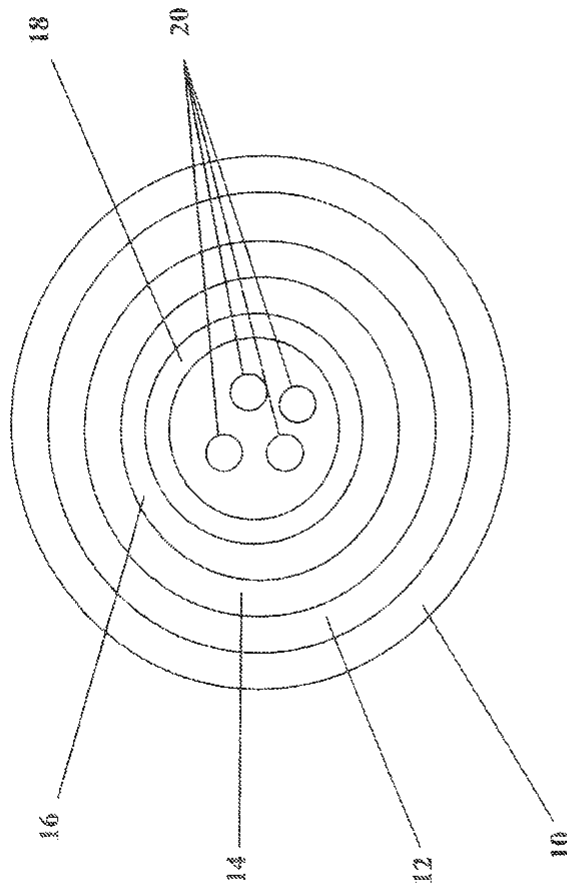


FIG. 2

US 10,444,454 B2

1
**ARMORED FLEXIBLE FIBER OPTIC
ASSEMBLY**

CROSS REFERENCE TO RELATED
APPLICATION

This application is a continuation of U.S. patent application Ser. No. 14/882,716, filed on Oct. 14, 2015, which is a continuation of U.S. patent application Ser. No. 14/055,611, filed on Oct. 16, 2013, now U.S. Pat. No. 9,182,562. The patent applications identified above are incorporated here by reference in their entirety to provide continuity of disclosure.

BACKGROUND

The disclosed technology relates generally to an armored flexible fiber optic assembly. Traditionally, fiber optic assemblies include optical fibers that conduct light for transmitting voice, video and/or data. The construction of fiber optic cables preserves optical performance of the fibers when deployed in an intended environment while also meeting official standards for the environment. For instance, indoor cables for riser and/or plenum spaces may require certain flame-retardant ratings to meet the demands of the space. These flame-retardant ratings can be in addition to mechanical requirements or desired characteristics for the space, e.g., crush performance, permissible bend radii, temperature performance, and the like. These characteristics are desired to inhibit undesirable optical attenuation or impaired performance during installation and/or operation within the space.

By way of example, some indoor applications use a fiber optic cable disposed within an armor layer for providing improved crush performance in riser and/or plenum spaces. For instance, conventional armored constructions have a fiber optic cable disposed within a metallic interlocking armor. This interlocking armor can be wound about the fiber optic cable so that the edges of the adjacent wraps of armor mechanically interlock forming an interlocked armor layer with a large bend radius, e.g., greater than 75 mm and a large outside diameter (OD), e.g., 12.5 mm.

SUMMARY

This specification describes technologies relating to an armored flexible fiber optic assembly. In one implementation, the fiber optic cable assembly comprises: a non-interlocking armor, the non-interlocking armor is a spiral tube having an outside diameter of approximately 1.5 mm-5.5 mm, an inner diameter of approximately 0.75 mm-5.25 mm and a minimum bend radius of approximately 5 mm, the non-interlocking armor being formed from stainless steel; an inner jacket, the inner jacket having an outside diameter slightly less than the inner diameter of the non-interlocking armor; at least one fiber optic fiber; and a strengthening material, the strengthening material being made from aramid fibers and surrounding the at least one fiber optic fiber underneath the inner jacket.

Some implementations also comprise: an outer jacket, the outer jacket having an inside diameter slightly greater than the outside diameter of the non-interlocking armor; and a pull material, the pull material being made from aramid fibers, the pull material being positioned underneath the outer jacket and on top of the non-interlocking armor.

In some implementations, the non-interlocking armor can have one or more of the following: a gap between each concentric ring, the gap is approximately 0.05 mm to 1 mm;

2

a thickness of approximately 0.25 mm-0.75 mm; and/or a crush resistance of approximately ≥ 100 KGf/100 mm. The fiber optic cable assembly can also have an outside diameter of approximately 1.65 mm to 5.5 mm.

In some implementations, the at least one fiber optic fiber can be a 62.5/125 μ m multimode fiber, a 50/125 μ m 10G OM3/OM4 fiber, a 9/125 μ m single mode G.652.D fiber, a 9/125 μ m single mode bend-insensitive fiber, or any suitable fiber, for example, G.657.A1, G.657.A2, G.657.B1, G.657.B2, G.657.B3.

The advantages of the fiber optic cable are a smaller OD and a highly flexible fiber. The cable is much easier to install and saves space in data centers, cable trays and under raised floors.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 shows a side view of an armored flexible fiber optic assembly; and

FIG. 2 shows a cross section of an armored flexible fiber optic assembly.

DETAILED DESCRIPTION

This specification describes technologies relating to flexible armor for fiber optic cable assemblies. The fiber optic cable of the disclosed technology is armored yet flexible with a smaller OD than conventional armored fiber optic cables typically used in the telecommunications market.

Fiber optic cable assemblies refer to the complete assembly of fibers, e.g., buffer tubes, ripcords, stiffeners, strengthening material, outer and inner protective coverings, etc. Fiber optic cable assemblies provide protection for the optical fiber or fibers within the environment in which the cable is installed. Fiber optic cable assemblies come in many different types, depending on the number of fibers and how and where it will be installed.

A function of the cable assembly is to protect the fibers from the environment encountered in and after installation, e.g., will the cable: (1) become wet or moist; (2) have to withstand high pulling tension for installation in conduit or continual tension as in aerial installations; (3) have to be flame-retardant; (4) be installed around tight bends; (5) be exposed to chemicals; (6) have to withstand a wide temperature range; (7) be gnawed on by rodents; and (8) be exposed to any other environmental issues.

The bend radius is of particular importance in the handling of fiber optic cables. The minimum bending radius varies with different cable designs. That is, optical fiber is sensitive to stress, particularly bending. When stressed by bending, light in the outer part of the core is no longer guided in the core of the fiber so some is lost, coupled from the core into the cladding, creating a higher loss in the stressed section of the fiber. Fiber coatings and cables are designed to prevent as much bending loss as possible, but its part of the nature of the fiber design. Bending losses are a function of the fiber type (e.g., single mode or multi mode), fiber design (e.g., core diameter and numerical aperture), transmission wavelength (e.g., longer wavelengths are more sensitive to stress) and cable design (e.g., fire resistance and/or crush resistance). The normal recommendation for fiber optic cable bend radius is the minimum bend radius under tension during pulling is 20 times the diameter of the cable. When not under tension, the minimum recommended long term bend radius is 10 times the cable diameter. Besides mechanical destruction, excessive bending of fiber-optic cables can cause microbending and macrobending losses.

US 10,444,454 B2

3

Microbending causes light attenuation induced by deformation of the fiber while macrobending loss refers to losses induced in bends around mandrels or corners in installations.

To avoid microbending and macrobending issues, bend insensitive fiber have been developed. Bend insensitive (BI) fiber cable offers greater flexibility in demanding environments than traditional fiber cable. It is typically used in data centers or any space constrained area where tight bends and flexibility are required. Bend-insensitive fibers may add a layer of glass around the core of the fiber which has a lower index of refraction that literally "reflects" weakly guided modes back into the core when stress normally causes them to be coupled into the cladding. In some fibers, a trench, or moat, surrounds the core in both BI single mode fiber (SMF) and BI multi mode fiber (MMF) to reflect lost light back into the core. The trench is an annular ring of lower index glass surrounding the core with very carefully designed geometry to maximize the effect. Bend-insensitive fiber has obvious advantages. In patch panels, it does not suffer from bending losses where the cables are tightly bent around the racks. In buildings, it allows fiber to be run inside molding around the ceiling or floor and around doors or windows without inducing high losses. It's also guards against problems caused by careless installation.

Many applications for BI SMF are in premises installations like apartment buildings or for patchcords, where it

4

Under the outer jacket 10 is the outer pull material 12. The outer pull material 12 can be aramid fibers which absorb the tension needed to pull the cable during installation. Aramid fibers are used because of their strength and the fact that they do not stretch. If pulled hard, the aramid fibers will not stretch but may eventually break when tension exceeds their limits. The proper method of pulling fiber optic cables is always to attach a pull rope, wire or tape to the pull material. For short term stresses, the maximum tension is approximately 800 N. For long term stresses, the maximum tension is approximately 600 N.

The armor 14 can be a non-interlocking stainless steel tube, e.g. SUS 204. The benefit of using a non-interlocking armor is that the bend radius is substantially smaller than a bend radius of an interlocked steel tube. It is also much lighter and easier to work with. The armor 14 can be a spiral tube having a gap 22 between each spiraling ring, the gap 22 can be 0.05 mm to 1 mm. The spiral tube 14 has an OD of approximately 1.5 mm-5.5 mm, a thickness of approximately 0.25 mm-0.75 mm and an inner diameter of approximately 0.75 mm-5.25 mm. The armor has a crush resistance of approximately ≥ 100 KGf/100 mm. The armor 14 offers increased crush protection, higher axial strength and corrosion resistance.

The table below shows examples of varying armors:

	Material	Outer Diameter	Inner Diameter	Thickness	Strength	Bend Radius
1 Core	SUS204	1.65 ± 0.05 mm	1.25 ± 0.05 mm	0.25 ± 0.02 mm	≥300 KGf/100 MM	≥5 D
2 Cores	SUS204	2.75 ± 0.05 mm	2.05 ± 0.05 mm	0.32 ± 0.02 mm	≥300 KGf/100 MM	≥5 D
4 Cores	SUS204	3.05 ± 0.05 mm	2.35 ± 0.05 mm	0.32 ± 0.02 mm	≥300 KGf/100 MM	≥5 D
6 Cores	SUS204	3.55 ± 0.05 mm	2.85 ± 0.05 mm	0.35 ± 0.02 mm	≥300 KGf/100 MM	≥5 D
12 Cores	SUS204	3.55 ± 0.05 mm	2.85 ± 0.05 mm	0.35 ± 0.02 mm	≥300 KGf/100 MM	≥5 D
24 Cores	SUS204	4.05 ± 0.05 mm	3.25 ± 0.05 mm	0.42 ± 0.02 mm	≥300 KGf/100 MM	≥5 D

simplifies installation and use. BI SMF is also used in outside plant cables since it allows fabrication of smaller, lighter high fiber count cables.

In many applications where BI fiber are used, the fiber may be exposed crush loads as well as rodents. The problem that arises is that the armor used to protect standard fiber has a bend radius of usually <75 and an OD of 12.5 mm. When used in applications with tight bend area, the armored cable either does not fit into tight spaces due to its large OD and/or does not conform to a necessary bend. In these cases, unarmored fiber optic cables are used. This leaves open the possibility of the cable being crushed or cut.

The subject matter of the disclosed technology overcomes this problem by using a highly flexible armor with a smaller OD. As shown in FIGS. 1 and 2, the fiber optic cable assembly 1 includes an outer jacket 10, an outer pull material 12, stainless steel armor 14, an inner jacket 16, an inner strengthening material 18 and one or more fiber optic fibers 20.

The outer jacket 10 is the outermost layer of protection for the fibers 20 that is chosen to withstand the environment in which the cable 1 is installed. For outside cables, the outer jacket 10 will generally be black polyethylene (PE) which resists moisture and sunlight exposure. For indoor cables, the outer jacket 10 may be a flame-retardant jacket that can be color-coded to identify the fibers 20 inside the cable 1, e.g., PVC, LSZH, TPU, ETFE or OFNP. The jacket 10 thickness can be approximately 0.25 mm-1.5 mm and come in a variety of colors, e.g., yellow, orange, aqua, blue, etc.

An inner jacket 16 is a layer of protection for the fibers 20 of the fiber cables 1 that have been stripped of the outer protective layer 12 and armor 14. The inner jacket 16 is chosen to withstand the environment in which the cable 1 is installed. The inner jacket 16 may be a flame-retardant jacket that can be color-coded to identify the fibers 20 inside the cable, e.g., PVC, LSZH, TPU, ETFE or OFNP. The jacket 16 thickness can be approximately 0.25 mm-1.5 mm and come in a variety of colors, e.g., yellow, orange, aqua, blue, etc. In most cases, the color of the inner jacket 16 is the same as the color for the outer jacket 10.

The strengthening material 18 at least partially surrounds the optical fibers 20. The strengthening material 18 may be formed of any suitable material. According to some embodiments, the strengthening material 18 can be aramid fibers. Other suitable materials may include fiberglass or polyester. The strengthening material 18 can be aramid fibers which can absorb the tension needed to pull the inner cable and provide cushioning for the fibers 20, thus ensuring that the optical fibers do not stretch or bind within the cable.

Optical fibers 20 consist of a core and a cladding layer, selected for total internal reflection due to the difference in the refractive index between the two. In practical fibers, the cladding is usually coated with a layer of acrylate polymer or polyimide. This coating protects the fiber from damage but does not contribute to its optical waveguide properties. Individual coated fibers (or fibers formed into ribbons or bundles) then have a tough resin buffer layer and/or core tube(s) extruded around them to form the cable core. A

US 10,444,454 B2

5

standard fiber has a primary buffer coating of approximately 250 microns and can add a tight buffer coating such as a soft protective coating applied directly to the 250 micron coated fiber to provide additional protection for the fiber, allowing easier handling and even direct termination for the fiber.

In some implementations, the optical fibers 20 can be 62.5/125 μm multimode fibers, 50/125 μm 10G OM3/OM4 fibers, 9/125 μm single mode G.652.D fibers, 9/125 μm single mode bend-insensitive fibers, or any suitable fibers, for example, G.657.A1, G.657.A2, G.657.B1, G.657.B2, G.657.B3.

While this specification contains many specific implementation details, these should not be construed as limitations on the scope of the disclosed technology or of what can be claimed, but rather as descriptions of features specific to particular implementations of the disclosed technology. Certain features that are described in this specification in the context of separate implementations can also be implemented in combination in a single implementation. Conversely, various features that are described in the context of a single implementation can also be implemented in multiple implementations separately or in any suitable subcombination. Moreover, although features can be described above as acting in certain combinations and even initially claimed as such, one or more features from a claimed combination can in some cases be excised from the combination, and the claimed combination can be directed to a subcombination or variation of a subcombination.

The foregoing Detailed Description is to be understood as being in every respect illustrative, but not restrictive, and the scope of the disclosed technology disclosed herein is not to be determined from the Detailed Description, but rather from the claims as interpreted according to the full breadth permitted by the patent laws. It is to be understood that the implementations shown and described herein are only illustrative of the principles of the disclosed technology and that various modifications can be implemented without departing from the scope and spirit of the disclosed technology.

The invention claimed is:

1. A fiber optic cable assembly comprising:

a non-interlocking armor, the non-interlocking armor being formed from a single spiral tube having a gap between each spiraling ring of the spiral tube, the gap allowing the fiber optic cable assembly to have a bend radius of $\geq 5 D$;

6

an outer jacket, the outer jacket having an inside diameter slightly greater than an outside diameter of the non-interlocking armor;

a pull material, the pull material being positioned underneath the outer jacket and on top of the non-interlocking armor; and

at least one fiber optic fiber.

2. The fiber optic cable assembly of claim 1 further comprising:

an inner jacket, the inner jacket having an outside diameter slightly less than an inner diameter of the non-interlocking armor; and

a strengthening material, the strengthening material surrounding the at least one fiber optic fiber underneath the inner jacket.

3. The fiber optic cable assembly of claim 2 wherein the single, continuous metallic strip is stainless steel.

4. A fiber optic cable assembly comprising:

at least one fiber optic fiber; and

an armor for providing crush resistance for the at least one fiber optic cable, the armor being a single spiral tube having a gap between each spiraling ring of the spiral tube, the gap allowing the fiber optic cable assembly to have a bend radius of $\geq 5 D$;

5. The fiber optic cable assembly of claim 4 wherein the spiral tube is stainless steel.

6. The fiber optic cable assembly of claim 5 further comprising:

an outer jacket, the outer jacket having an inside diameter slightly greater than an outside diameter of the non-interlocking armor; and

a pull material, the pull material being positioned underneath the outer jacket and on top of the non-interlocking armor.

7. The fiber optic cable assembly of claim 6 further comprising:

an inner jacket, the inner jacket having an outside diameter slightly less than an inner diameter of the non-interlocking armor; and

a strengthening material, the strengthening material surrounding the at least one fiber optic fiber underneath the inner jacket.

* * * * *

Exhibit B

CERTICABLE COMPARISON CHART

Claims of the 10,444,454 Patent	Nanofiber
<u>Claim #1</u> A fiber optic assembly comprising:	The Nanofiber functions as a fiber optic cable assembly.
A non-interlocking armor.	The Nanofiber includes a non-interlocking armor.
The non-interlocking armor being formed from a single spiral tube having a gap between each spiraling ring of the spiral tube,	The non-interlocking armor is formed from a single spiral tube having a gap between each spiraling ring of the spiral tube.
The gap allowing the fiber optic cable assembly to have a bend radius of $\geq 5 D$,	The gap of the non-interlocking armor allows the fiber optic cable assembly to have a bend radius of $\geq 5 D$;
An outer jacket,	The Nanofiber includes an outer jacket,
the outer jacket having an inside diameter slightly greater than an outside diameter of the non-interlocking armor.	The outer jacket has an inside diameter slightly greater than the outside diameter of the non-interlocking armor.
A pull material,	The Nanofiber includes a pull material.
the pull material being positioned underneath the outer jacket and on top of the non-interlocking armor, and	The pull material is positioned underneath the outer jacket and on top of the non-interlocking armor
At least one fiber optic fiber.	The Nanofiber includes at least one fiber optic fiber.
<u>Claim # 2</u> The fiber optic cable assembly of claim 1 further comprising:	The Nanofiber functions as a fiber optic cable assembly.

<p>An inner jacket, the inner jacket having an outside diameter slightly less than an inner diameter of the noninterlocking armor; and</p>	<p>an outer jacket, the outer jacket having an inside diameter slightly greater than an outside diameter of the non-interlocking armor</p>
<p>A strengthening material, the strengthening material surrounding the at least one fiber optic fiber underneath the inner jacket.</p>	<p>an armor for providing crush resistance for the at least one fiber optic cable,</p>
<p><u>Claim # 3</u> The Fiber optic cable assembly of claim 2 wherein the single, continuous metallic strip is stainless steel.</p>	<p>The Nanofiber functions as a fiber optic cable assembly.</p>
<p><u>Claim #4</u> A fiber optic cable assembly comprising:</p>	<p>The Nanofiber functions as a fiber optic cable assembly.</p>
<p>at least one fiber optic fiber; and</p>	<p>The Nanofiber includes at least one fiber optic fiber.</p>
<p>an armor for providing crush resistance for the at least one fiber optic cable,</p>	<p>The Nanofiber includes armor for providing crush resistance for the at least one fiber optic cable.</p>
<p>the armor being a single spiral tube having a gap between each spiraling ring of the spiral tube,</p>	<p>The armor is a single spiral tube having a gap between each spiraling ring of the spiral Tube.</p>
<p>the gap allowing the fiber optic cable assembly to have a bend radius of $\geq 5 D$.</p>	<p>The gap allows the fiber optic cable assembly to have a bend radius of $\geq 5 D$.</p>